


Garryson[®]




















INTRODUCTION

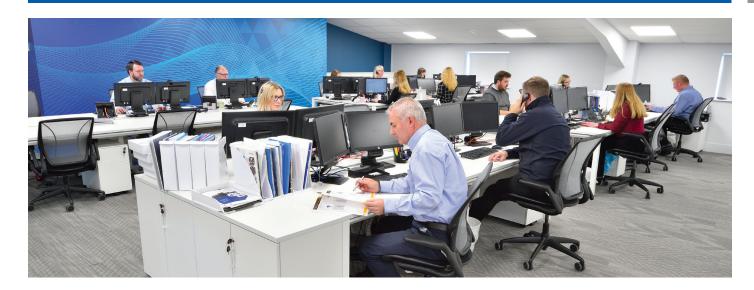

INTRODUCTION

With over 50 years experience, ATA is a global leader in the provision of high-end products. Our comprehensive portfolio offers a solution for every grinding and finishing application, optimising processes in terms of economic efficiency, reliability and safety. Our customers come from a wide variety of industries, including automotive, aerospace, foundries, metal fabrication, oil & gas, marine, medical, rail and power & energy.

INNOVATION

Continuous investment in customer and application driven product development, providing the most effective solutions

PEOPLE AND EXPERTISE

An experienced and skilled team of abrasive engineers, technical support and customer support teams, ensuring the best service

TOOL AND CONSUMABLE COMBINATIONS

Products can be combined with a comprehensive range of ATA Air Tools, ensuring maximum performance output







ATA Tools Ltd., IDA Business & Technology Park, Killygarry, Cavan, Co. Cavan, H12 DK46, Ireland

T: +353 (0) 49 432 6178
E: sales@atagroup.ie
W: www.atagroup.co

ATA Garryson Ltd., Spring Road, Ibstock, Leicestershire, LE67 6LR, United Kingdom


T: +44 (0) 1530 261 145 **E:** sales@atagarryson.com **W:** www.atagroup.co ATA Tools, Inc. 7 Ascot Parkway, Cuyahoga Falls, Ohio 44223, USA

T: +1 330 928 7744
E: sales@atatools.com
W: www.atagroup.co

Ordering Information

International T: +353 (0) 49 432 6178 **E:** sales@atagroup.ie **UK T:** +44 (0) 1530 261 145 **E:** sales@atagarryson.com **US T:** +1 330 928 7744 **E:** sales@atatools.com


ICON LIBRARY

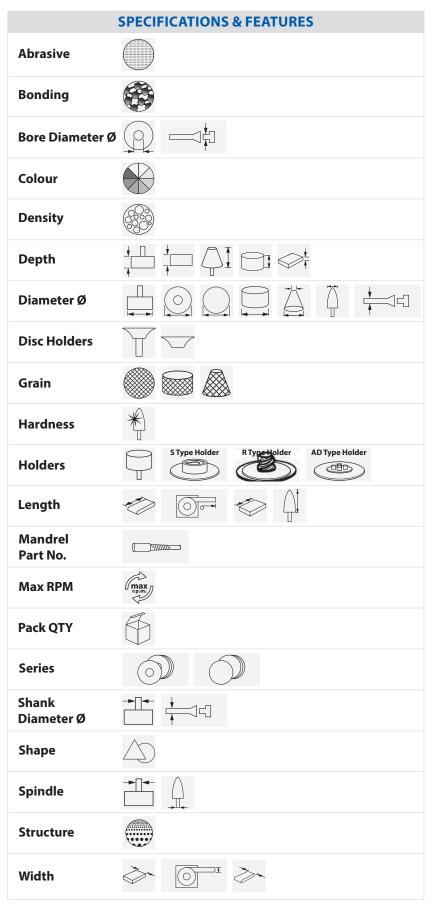











Ordering Information

International T: +353 (0) 49 432 6178 E: sales@atagroup.ie
UK T: +44 (0) 1530 261 145 E: sales@atagarryson.com
US T: +1 330 928 7744 E: sales@atatools.com
(See price list for full list of part codes)

urface Preparation & Cleanin



MINI-FLEXIDISCS® - ZIRCONIUM MINI-FLEXIDISCS®















Mini-Flexidiscs®



Zirconium Mini-Flexidiscs®

Patented small diameter flexible flapdiscs

- Ideal for blending and finishing on Ferrous materials where accessibility is a problem and the work area is curved or profiled
- Mini-Flexidiscs® offer improved access to awkward areas and the flexibility for blending and finishing on curved surfaces, profiles and contours













Part No:		Diameter Ø	Max RPM	Pack Qty	Disc Holder 1	Disc Holder 2
GFLXZ050	40 60 80 120	50mm	25,000	10	GQR050/GQR050FRM	-
GFLXZ075	40 60 80 120	75mm	20,000	10	GQR075	GQRM1420MD















Part No:		Diameter Ø	Max RPM	Pack Qty	Disc Holder 1	Disc Holder 2
GFLXZ050	40 60 80 120	50mm	25,000	10	GQS050/GQS050FRM	-
GFLXZ075	40 60 80 120	75mm	20,000	10	GQS075	GQSM1420MD

MINI-FLEXIDISCS® - ALUMINIUM OXIDE MINI-FLEXIDISCS®















Mini-Flexidiscs®



Aluminium Oxide Mini-Flexidiscs®

Patented small diameter flexible flapdiscs

- Ideal for blending and finishing on Ferrous materials where accessibility is a problem and the work area is curved or profiled
- Mini-Flexidiscs® offer improved access to awkward areas and the flexibility for blending and finishing on curved surfaces, profiles and contours













Part No:		Diameter Ø	Max RPM	Pack Qty	Disc Holder 1	Disc Holder 2
GFLXA050	0 40 60 80 120	50mm	25,000	10	GQR050/GQR050FRM	-
GFLXA075	6 40 60 80 120	75mm	20,000	10	GQR075	GQRM1420MD















Part No:		Diameter Ø	Max RPM	Pack Qty	Disc Holder 1	Disc Holder 2
GFLXA050	40 60 80 120	50mm	25,000	10	GQS050/GQS050FRM	-
GFLXA075	40 60 80 120	75mm	20,000	10	GQS075	GQSM1420MD

Ordering Information

International T: +353 (0) 49 432 6178 E: sales@atagroup.ie **UK T:** +44 (0) 1530 261 145 **E:** sales@atagarryson.com **US T:** +1 330 928 7744 **E:** sales@atatools.com


MINI-FLEXIDISCS® - CERAMIQ™ MINI-FLEXIDISCS®













Finishing

Mini-Flexidiscs®



CERAMIQ™ Mini-Flexidiscs®

Patented small diameter flexible flapdiscs

- Ideal for aggressive blending and finishing on difficult to grind materials
- Mini-Flexidiscs® offer improved access to awkward areas and the flexibility for blending and finishing on curved surfaces, profiles and contours













Р	Part No:		Diameter Ø	Max RPM	Pack Qty	Disc Holder 1	Disc Holder 2
G	GFLXCIQ50	40 60 80	50mm	25,000	10	GQR050/GQR050FRM	-
G	GFLXCIQ75	40 60 80	75mm	20,000	10	GQR075	GQRM1420MD

SAFETY INSTRUCTIONS

Abrasive Operations Safety User Information

WARNING:

In normal grinding and finishing operations, material that is being removed from the work piece, such as burs, scale, dirt, weld slag or other residue, will breakaway with considerable force. Also any coated abrasives, will cause cloth and abrasive grain to be released into the atmosphere.

The potential of serious injury exists for both the abrasive operator and others in the direct work area. To protect against this hazard, operators and others in the area MUST wear appropriate protective clothing and safety equipment such as SAFETY GOGGLES or FULL FACE SHIELDS, along with PROTECTIVE CLOTHING AND RESPIRATORY EQUIPMENT.

All operators must follow the safety instructions as well as common safety practices to reduce the likelihood or severity of physical injury.



1. SAFETY GOGGLES: Approved safety goggles or full face shields MUST BE WORN.

2. GUARDS: Always keep all guards in place on any equipment and read operating equipment instructions.


3. SPEEDS: Always observe speed restrictions indicated on the abrasive product, containers, labels or

printed material and the machine. "MAX RPM" means: Maximum Revolutions Per Minute.

THIS MUST NOT BE EXCEEDED UNDER ANY CIRCUMSTANCE.

4. SHANK: When using an abrasive product or accessory with a shank, make sure the shank is fitted

securely into the machine with no more than 5mm overhang between the chuck or collet.



DO NOT ALLOW UNSAFE CONDITIONS:

Worn bearings, bent spindles, unbalanced machines, unusual application, operator abuse or inappropriate use are considered unsafe conditions and may cause the abrasive product to fail. Specifically with bonded abrasives a hard impact may damage the product. Additionally, bonded abrasives must be used in accordance to their specific use-by date. Do not use, or continue to use, an abrasive product which is functioning improperly (i.e. out-of-balance, etc) as this increases the possibility for the abrasive to fail and cause injury. Any failure or unsafe condition should be evaluated and corrected immediately.

NOTE:

Safety data and instructions are typical and should not be construed as complete for the abrasive product and the equipment being used. Safety procedures may vary and should be specific to the equipment being used, speeds of operations, material being finished, selected abrasives, and other parameters.

Ordering Information

International T: +353 (0) 49 432 6178 E: sales@atagroup.ie **UK T:** +44 (0) 1530 261 145 **E:** sales@atagarryson.com **US T:** +1 330 928 7744 **E:** sales@atatools.com (See price list for full list of part codes)

International Offices

t: +353 (0) 49 432 6178 **f:** +353 (0) 49 432 6298

e: sales@atagroup.ie **w:** www.atagroup.co

ATA Tools Ltd., IDA Business & Technology Park, Killygarry, Cavan, Co. Cavan, H12 DK46, Ireland

UK Offices

t: +44 (0) 1530 261 145 **f:** +44 (0) 1530 262 801

e: sales@atagarryson.com **w:** www.atagroup.co

ATA Garryson Ltd., Spring Road, Ibstock, Leicestershire, LE67 6LR, United Kingdom ata

US Offices

t: +1 330-928-7744 **f:** +1 330-849-2977

e: sales@atatools.com **w:** www.atagroup.co

ATA Tools Inc., 7 Ascot Parkway, Cuyahoga Falls, Ohio 44223, USA